


# Universal Sliding Rack | 6735(3)



The 6735(3) 2U 1gx Universal Sliding Rack is an excellent choice for applications requiring an extremely compact and easy-to-use design. It is used to patch, or to patch and splice fibers and to provide cross-connection capability. It accommodates up to 36 to 48 direct or splice terminations and can use a wide variety of connector types. The panel can be installed in either a 19" or a 23" rack and occupies only 3.5" 2U of rack space. Splice trays and internal fiber management are housed in a sliding drawer that latches securely in both the open and closed positions. Jumpers can exit either to the left or right at the front of the panel.

The patch panels use standard 7" 1gx plates and are available with factory terminated, and pre-loaded Cables or Pigtails. Standard optical Cables and Pigtails may be ordered in specific lengths; terminated with TIA/EAI standard connectors including: SC, FC, LC, and ST; loaded into the sliding rack; and shipped as a single unit.

## Features & Benefits

### Features

- [+] Can accommodate up to 36 connections 2U (3.5")
- [+] Suitable for both 19" and 23" frames
- [+] Comes equipped with pigtails for field splicing but also available with pre-connectorized stubbed cable
- [+] Securely fastened patchcords can exit to left or right
- [+] Front access via sliding tray
- [+] Acrylic Front Door


### Benefits

- [+] Minimizes use of rack space
- [+] Low profile and compact design
- [+] Easily installed in existing frames for mix-and-match applications
- [+] LGX Standard 7" adapter plates
- [+] Save time and money on installation
- [+] Flexibility in configurations
- [+] Excellent cable management
- [+] Easy access to splice trays and internal fiber management
- [+] Compatible with existing plant
- [+] 3.5" h x 17" w x 12" d
- [+] Made in the U.S.A.

## 2U Sliding Rack



## 2U Sliding Rack

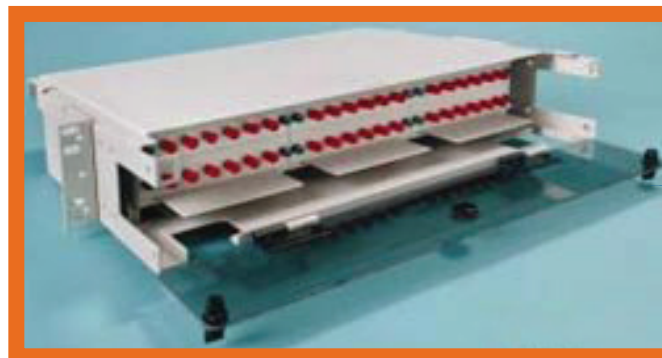

\*Call your FiberSource Representative for configuration and availability. Some variations may have limited availability or may be subject to minimum order quantity requirements.

FiberSource | Precision Connectivity Solutions

[www.fibersource.net](http://www.fibersource.net)

[sales@fibersource.net](mailto:sales@fibersource.net)

888.342.3776



7034 Augusta Road, Greenville, South Carolina 29605 USA / International +1 864.277.7200  
Issue Date: 10.29.2009 V2 / FS109

# Universal Sliding Rack | 6735(3)



## Ordering Guide

For More Information Contact Us at [sales@fibersource.net](mailto:sales@fibersource.net) or 888.342.3776.

### 6735 (Patch & Splice Sliding Rack) Old PSSR (12 splices/tray 3 MAX)

| 1 Family | 2 Fiber Type & Cable stub/Pigtail  | 3 Rack Width | 4 Adapter Style  | 5 Adapter Quantity            | 6 Pigtail or Fiber Count      | 7 Stub Cable Type  | 8 Tray Count       | 9 Cable Length         | 10 Measurement             |
|----------|--|--------------|--|-------------------------------|-------------------------------|--|--------------------|------------------------|----------------------------|
| 6735(3)  | A=ESM Stub<br>B=MM62 Stub<br>C=MM50 Stub<br>D=ESM pigtail<br>E=62MM pigtail<br>F=50MM pigtail<br>G=BBXS bl pigtail<br>H=BBXS ylw pigtail | A=19"and 23" | A=SCU<br>B=SCA<br>C=ST<br>D=FCU<br>E=FCA<br>F=LCU dx<br>G=LCA dx<br>J=SCU MM<br>K=STU MM<br>NA=X | Count=000<br>NA=XXX<br>MAX=36 | Count=000<br>NA=XXX<br>MAX=36 | A=LT<br>B=IOLT OFR<br>C=TB OFR<br>D=TB OFP<br>E=NSTD<br>F=IOLT OFP<br>G=Diel<br>Rbn OFR<br>X=Pigtail or none | Count=00<br>NA=X X | Length=0000<br>NA=XXXX | Feet=F<br>Meters=M<br>NA=X |
| 0        | X  | X            | X  | XXX                           | XXX                           | X  | XX                 | XXXX                   | X                          |

## CONFIGURATION QUESTIONS FOR PATCH & SPLICE SLIDING RACK

### 1. What is the Hardware Type?

O (letter) The Product Family is Universal Sliding Rack

### 2. What is the Fiber Type and Cable Configuration?

Stubbed Cables are Patch Only  
Pigtails are Patch & Splice Only

- A Single Mode Cable Stub
- B 62.5mm Cable Stub
- C 50mm Cable Stub
- D Single Mode Pigtail
- E 62.5um MM Pigtail
- F 50um MM Pigtail
- G Bendbright<sup>XS</sup> Blue Pigtail
- H Bendbright<sup>XS</sup> Yellow Pigtail
- X No Cables or Pigtails

### 3. What is the Rack Width?

- A Mountable on Either 19" or 23"

### 4. What is the Adapter Style?

- A SCU
- B SCA
- C STU
- D FCU
- E FCA
- F LCU dx
- G LCA dx
- J SCU MM
- K STU MM
- X No Adapters

### 5. What is the Adapter Quantity?

- 000 36
- XXX none on NA

### 6. What is the Pigtail Count or Stubbed Cable Fiber Count?

- 002-036 Pigtail or Cable Fiber Count
- XXX No Pigtails or Stubs

### 7. What is the Connectorized Cable Stub Type?\*

- A OSP Loose Tube Non Armored
- B Indoor/Outdoor Loose Tube Non Armored OFR
- C Tight Buffer OFR
- D Tight Buffer OFP
- E Non-Standard Cable (Anything Not Listed)
- F Indoor/Outdoor Loose Tube Non Armored OFP
- G Dielectric Central Tube Ribbon OFR
- X Pigtails or No Cable

### 8. What is the Splice Tray Count?

- 01 <12F
- XX No Trays "Patch Only"

### 9. What is the Pigtail (3M Standard) or Stub Cable Length?

- 0000-9999 Length for Either Cable or Pigtails
- 0003 Standard Pigtail Length (M)

### 10. What is the Unit of Length?

- M Meter
- F Feet

\*Call your FiberSource Representative for configuration and availability. Some variations may have limited availability or may be subject to minimum order quantity requirements.